



CC1000 SMALL JOINT CUTTING SAW

The Ultra Lightweight Saw That Cuts Decorative and Joint Cutting in Concrete

Powered By:



8" Blade Capacity

Gasoline

Electric

FEATURES

- Power transference to blade drive via 2 molded notch 3VX premium belts for better cutting performance and long belt life
- Easy to maneuver push drive
- Cyclone air cleaner for increased engine longevity
- **Center cut design** making it easier to keep the cut straight
- **Up-cut design** for a cleaner cut
- Adjustable blade alignment
- 1/8" steel frame
- 1" or 5/8" arbor with grease bearings

SPECIFICATIONS

| | |
|----------------------|------------------------------------|
| Max. Depth of Cut | 2.250" with 8" diameter blade |
| Blade Shaft RPM | 6100 |
| Blade Shaft Diameter | 1" |
| Arbor Size | 1" or .625" option |
| Front Wheels Size | 3" x 2" x .750" |
| Rear Wheels Size | 5" x 2" x .750" |
| Dimensions | 14.5" wide, 34.5" tall, 23.5" long |

Note: Electric saws do not ship with electric cord or pigtails.
3-Phase powered saws do not include male electric connector for control box

CC1000 SMALL JOINT CUTTING SAW

| Model # | Engine/Motor Make | Engine/Motor Power | Power Source | Part # | Cat # | Blade Capacity | Product Weight (lbs) |
|-----------|-------------------------|-------------------------------|--------------|---------|-------|----------------|----------------------|
| CC1025E-8 | Baldor® | 2.5 HP, 110V/230V -1PH | Electric | 5800552 | 47104 | 8" | 75 |
| CC1025E-8 | Baldor®-5/8" shaft | 2.5 HP, 110V/230V -1PH | Electric | 5800716 | 63217 | 8" | 75 |
| CC1048H-8 | Honda® GX160 | 4.8 HP, 7.6 Torque (lbs.-ft.) | Gas | 5800551 | 46851 | 8" | 110 |
| CC1048H-8 | Honda® GX160-5/8" shaft | 4.8 HP, 7.6 Torque (lbs.-ft.) | Gas | 5800620 | 82084 | 8" | 120 |

Horsepower and torque as rated by the engine manufacturer

CC1100XL JOINT CUTTING MINI SAW




Powered By



Blade not included

The CC1100XL can be used with our joint cleaning diamond blades or joint cleaning wheels.

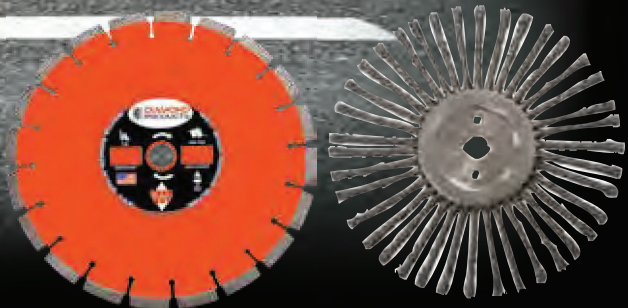

14" Blade Capacity Gasoline

FEATURES

- Heavy duty adjustable operator handles
- Easy to maneuver push drive
- Up-cut or down-cut available
- 1" arbor size with drive pin
- Compact size for easy transporting

SPECIFICATIONS

| | |
|----------------------|------------------------------------|
| Max. Depth of Cut | 4.625" with 14" diameter blade |
| Blade Shaft RPM | 2650 |
| Blade Shaft Diameter | 1" |
| Arbor Size | 1" |
| Front Wheels Size | 3" x 2" x .750" |
| Rear Wheels Size | 8" x 2" x .750" |
| Dimensions | 19.5" wide, 40.750" tall, 36" long |

CC1100XL JOINT CLEANING MINI GAS SAW

| Model # | Engine Make | Engine Power | Part # | Cat # | Blade Capacity | Product Weight (lbs) |
|---------------|----------------------|---------------------------------|---------|-------|----------------|----------------------|
| CC1111HXL-14 | Honda® GX390-Downcut | 11.7 HP, 19.5 Torque (lbs.-ft.) | 5801015 | 04648 | 14" | 185 |
| CC1111HUXL-14 | Honda® GX390-Upcut | 11.7 HP, 19.5 Torque (lbs.-ft.) | 5801020 | 08366 | 14" | 215 |

Horsepower and torque as rated by the engine manufacturer.



CCE0900 PORTABLE SAW

Powered By:



20" Blade Capacity
Gasoline



Heavy duty adjustable handles and precision screw feed raise and lower



Blade not included

FEATURES

- Heavy duty design, but light weight enough for two people to lift
- Cyclone air filter
- Easy to read built-in depth indicator
- Precision dial screw feed raise and lower handle
- Poly V-Belts
- Water tank* and lifting bale included

** For dust suppression when dry cutting.

SPECIFICATIONS

| | |
|----------------------|--------------------------|
| Max. Depth of Cut | 7-5/8" |
| Blade Shaft RPM | 2600 |
| Blade Shaft Diameter | 1" |
| Arbor Size | 1" with single drive pin |
| Blade Raise/Lower | Precision screw feed |
| Sawing Side | Right side only |

CCE0900 PORTABLE SAW

| Model # | Engine Make | Engine Power | Power Source | Part # | Cat # | Blade Capacity | Product Weight (lbs) |
|-------------|-------------|--------------|--------------|---------|-------|----------------|----------------------|
| CCE0911H-20 | Honda GX390 | 11.7 HP | Gas | 5801613 | 30396 | 20" | 290 |

Horsepower and torque as rated by the engine manufacturer.

CC1200XL PORTABLE SAW



Powered By:



Includes water tank
for dust suppression



14"-18" Blade Capacity
Gasoline



Heavy duty built-in depth indicator within easy view during operation allows quick measuring of the blade depth.

Blade not included

FEATURES

- Heavy duty design, but light weight enough for two people to lift
- Cyclone air filter
- Easy to read built-in depth indicator
- Dial screw feed raise and lower handle
- Adjustable heavy duty handles do not rattle like competitor handles
- Left or right hand sawing
- Poly V-Belts
- Water tank and lifting bale included

SPECIFICATIONS

| | |
|----------------------------------|--------------------------|
| Max. Depth of Cut with 14" Blade | 4-5/8" |
| Max. Depth of Cut with 18" Blade | 6-5/8" |
| Blade Shaft RPM | 2600 |
| Blade Shaft Diameter | 1-1/4" |
| Arbor Size | 1" with single drive pin |
| Blade Mounting | Right or left |
| Blade Raise/Lower | Precision screw feed |
| Depth Indicator | Standard |

CC1200XL SMALL WALK BEHIND SAW

| Saw Model # | Engine/Motor Make | Engine/Motor Model | Engine/Motor Power | Power Source | Blade Capacity | Part # | Cat # | Product Weight (lbs) |
|--------------|-------------------|--------------------|---------------------------------|--------------|----------------|---------|-------|----------------------|
| CC1208HXL-14 | Honda® | GX270 | 8.5 HP, 14.1 Torque (lbs.-ft.) | Gas | 14" | 5801092 | 32360 | 245 |
| CC1211HXL-14 | Honda® | GX390 | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 14" | 5801093 | 32363 | 271 |
| CC1208HXL-18 | Honda® | GX270 | 8.5 HP, 14.1 Torque (lbs.-ft.) | Gas | 18" | 5801095 | 32424 | 256 |
| CC1211HXL-18 | Honda® | GX390 | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 18" | 5801097 | 32453 | 294 |

Horsepower and Torque as rated by the engine manufacturer.

CC1200XL OPTIONS


| Description | Part # | Cat # |
|---|---------|-------|
| Lift frame kit for older (pre-2011 models)-Standard on all new saws | 6047309 | 39744 |
| Extra slip-on blade guard 14" | 6016001 | 92016 |
| Extra slip-on blade guard 18" | 6016000 | 92017 |

Horsepower and torque as rated by the engine manufacturer.




CC1300XL SMALL WALK BEHIND SAW

Powered By:



Shown with
optional water tank
& bracket kit

Electric models are
suitable where
exhaust fumes are
not allowed

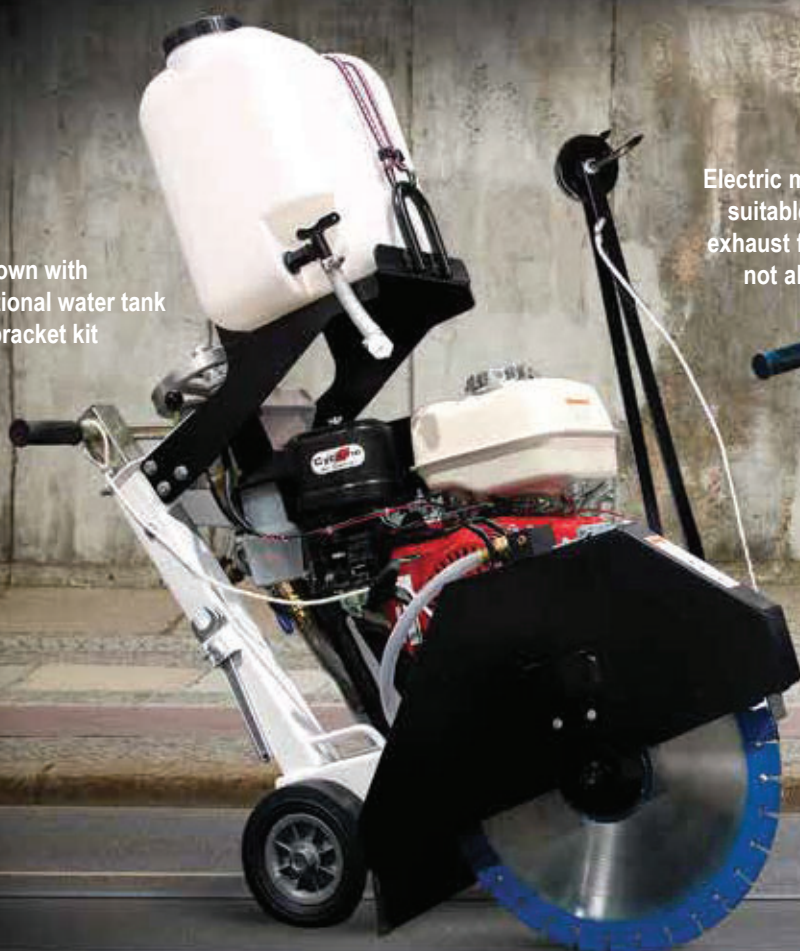

CC1311HXL-20
blade not included



CC1310E3XL-20
blade not included

14"-20" Blade Capacity

Gasoline

Electric

Hydraulic

FEATURES

- Heavy duty frame design
- Cyclone air filter (Honda® models)
- Easy to maneuver push drive
- Four position heavy duty handles offer no slack and don't rattle like other adjustable handles
- Through rear axle for added strength
- Solid sealed and self aligning blade shaft bearings
- Slip-on blade guard for easy blade access
- Three V-belts for extra power delivery to the blade shaft
- Left or right side sawing
- Optional water tank available for dust suppression

SPECIFICATIONS

| | |
|----------------------------------|--------------------------|
| Max. Depth of Cut with 14" Blade | 4-5/8" |
| Max. Depth of Cut with 18" Blade | 6-5/8" |
| Max. Depth of Cut with 20" Blade | 7-5/8" |
| Blade Shaft RPM | 2600 |
| Blade Shaft Diameter | 1-1/4" |
| Arbor Size | 1" with single drive pin |
| Blade Mounting | Right or left |
| Blade Raise/Lower | Precision screw feed |

Note: Electric saws do not ship with electric cord or pigtails.
3-Phase powered saws do not include male electric connector
for control box



CC1300XL SMALL WALK BEHIND SAW

| Saw Model # | Engine/Motor Make | Engine/Motor Model | Engine/Motor Power | Power Source | Blade Capacity | Part # | Cat # | Product Weight (lbs) |
|---------------|-------------------|--------------------|---------------------------------|--------------|----------------|----------|-------|----------------------|
| CC1308HXL-14 | Honda® | GX270 | 8.5 HP, 14.1 Torque (lbs.-ft.) | Gas | 14" | 5800575 | 75066 | 225 |
| CC1311HXL-14 | Honda® | GX390 | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 14" | 5800576 | 75067 | 260 |
| CC1305E1XL-14 | Baldor® | n/a | 5 HP, 230V-1PH | Electric | 14" | 5800577 | 75068 | 261 |
| CC1305E3XL-14 | Baldor® | n/a | 5 HP, 230V-3PH | Electric | 14" | 5800578A | 99977 | 275 |
| CC1305E3XL-14 | Baldor® | n/a | 5 HP, 480V-3PH | Electric | 14" | 5800578B | 26493 | 275 |
| CC1311HUXL-14 | Honda® | GX390 upcut | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 14" | 5800871 | 27131 | 350 |
| CC1308HXL-18 | Honda® | GX270 | 8.5 HP, 14.1 Torque (lbs.-ft.) | Gas | 18" | 5800579 | 75070 | 225 |
| CC1311HXL-18 | Honda® | GX390 | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 18" | 5800571 | 69995 | 260 |
| CC1305E1XL-18 | Baldor® | n/a | 5 HP, 230V-1PH | Electric | 18" | 5800580 | 75071 | 280 |
| CC1305E3XL-18 | Baldor® | n/a | 5 HP, 230V-3PH | Electric | 18" | 5800581A | 93652 | 245 |
| CC1305E3XL-18 | Baldor® | n/a | 5 HP, 480V-3PH | Electric | 18" | 5800581B | 97080 | 245 |
| CC1311HUXL-18 | Honda® | GX390 upcut | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 18" | 5800872 | 26751 | 350 |
| CC1310E3XL-20 | Baldor® | n/a | 10 HP, 230V-3PH | Electric | 20" | 5800589A | 93810 | 315 |
| CC1310E3XL-20 | Baldor® | n/a | 10 HP, 460V-3PH | Electric | 20" | 5800589B | 93220 | 340 |
| CC1310E3XL-20 | Baldor® | n/a | 10 HP, 230V/460V-3PH | Electric | 20" | 5800985 | 57763 | 335 |
| CC1311HXL-20 | Honda® | GX390 | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 20" | 5800723 | 21855 | 365 |
| CC1313HYXL-20 | Danfoss® | n/a | 15 GPM | Hydraulic | 20" | 5800724A | 37387 | 230 |
| CC1313HYXL-20 | Danfoss® | n/a | 20 GPM | Hydraulic | 20" | 5800724B | 50852 | 230 |
| CC1313HYXL-20 | Danfoss® | n/a | 25 GPM | Hydraulic | 20" | 5800724C | 37388 | 230 |

Horsepower and Torque as rated by the engine manufacturer.

CC1300XL OPTIONS

| Description | Part # | Cat # |
|--|---------|-------|
| Water Tank Kit with 5/8" hose (5 gal.)** - includes water tank bracket | 6049050 | 36252 |
| Extended Blade Shaft Kit (up to 1" spacing) | 6048107 | 48388 |
| Catalytic Muffler for 11HP Honda® | 2501567 | 78637 |
| Extra Slip-on Blade Guard 14" | 6048912 | 97088 |
| Extra Slip-on Blade Guard 18" | 6048910 | 97883 |
| Extra Slip-on Blade Guard 20" | 6048904 | 98682 |

** For dust suppression when dry cutting.

Water tank kit not available for electric saw models.



Heavy duty adjustable handles and precision screw feed raise and lower



CC1500E MODULAR SAW

Powered By:

BALDOR

20" Blade Capacity Electric

FEATURES

- Electric powered for areas with limited access and where exhaust fumes are not allowed
- Easy to maneuver push drive
- Motor can be removed in limited access areas to allow for a single person operation
- Screw feed raise and lower
- Full adjustable heavy duty handle design
- Lightweight Aluminum Frame and Lightest Weight Motor
- Enhanced V-Belt tensioning system keeps the belts tight



Quick Motor Removal Allows Easy One Person Transportation



SPECIFICATIONS

| | | | |
|----------------------------------|--------|----------------------|--------------------------|
| Max. Depth of Cut with 14" Blade | 4-5/8" | Blade Shaft Diameter | 1-1/4" |
| Max. Depth of Cut with 18" Blade | 6-1/2" | Arbor Size | 1" with single drive pin |
| Max. Depth of Cut with 20" Blade | 7-1/2" | Blade Mounting | Right or left |
| Blade Shaft RPM | 2000 | Blade Raise/Lower | Precision screw feed |

CC1500E MODULAR SAW


| Saw Model # | Motor Make | Motor Power | Power Source | Part # | Cat # | Blade Capacity | Product Weight (lbs.) |
|-------------|------------|-------------------|--------------|---------|-------|----------------|-----------------------|
| CC1507E3-20 | Baldor® | 7.5 HP 460V, 3 PH | Electric | 5801500 | 19131 | 20" | 185 |

CC1500E OPTIONS

| Description | Part # | Cat # |
|-------------------------|---------|-------|
| 14" slip-on blade guard | 6048912 | 97088 |
| 18" slip-on blade guard | 6048910 | 97883 |
| 20" slip-on blade guard | 6048904 | 98682 |

Horsepower and Torque as rated by the engine manufacturer.

Shown with electrical plug (not included). Comes with pigtail wires and plug must be installed.



CC1823BVXLP PROPANE SAW

Powered By:



Runs Clean and Efficiently

14"-20" Blade Capacity

Propane



Blade not included



Heavy duty handle design



CC1800XL control panel with screw feed, ignition switch, adjustable handles and hour meter. Handles have two sets of grips that can be positioned outward or inward (as shown).

FEATURES

- Briggs Vanguard engine converted to propane vapor draw
- Horizontally-mounted 20 lbs. propane tank
- Self-propelled travel for easy cutting
- Easy access to battery with heavy duty isolator switch to prevent battery drain
- Screw feed raise and lower
- Lifting hook standard on all models
- Self aligning blade shaft bearings
- Electric start

Includes: electric start, low oil alert and hour meter

SPECIFICATIONS

| | |
|----------------------------------|---|
| Max. Depth of Cut with 14" Blade | 4-5/8" |
| Max. Depth of Cut with 20" Blade | 7-5/8" |
| Blade Shaft RPM | 2600 |
| Blade Shaft Diameter | 1-1/4" |
| Arbor Size | 1" with single drive pin |
| Blade Shaft Drive | 4 belts |
| Blade Mounting | Right or Left |
| Transmission | Eaton Model 6 |
| Drive Speed | 0-80 feet per minute |
| Fuel tank size | 20lbs, 37lbs. when full |
| Wheel Dimensions | 5" x 1-1/2" x 3/4" (Front) 6" x 1-1/2" x 5/8" (Back) |
| Includes | Electric start, Low Oil Alert, Hour meter |

CC1823BVXLP PROPANE WALK BEHIND SAW

| Model # | Engine Make/Model | Engine Power | Blade Capacity | Part # | Cat # | Product Weight (lbs.) |
|-----------------|----------------------------|--------------|----------------|---------|--------|-----------------------|
| CC1823BVXLP-14S | Converted Briggs® Vanguard | 23 HP | 14" | 5801426 | 101227 | 480 |
| CC1823BVXLP-20S | Converted Briggs® Vanguard | 23 HP | 20" | 5801427 | 101228 | 485 |

CC1800XL OPTIONS

| Description | Part # | Cat # |
|---|---------|--------|
| Catalytic Muffler for 23HP Briggs Vanguard Engine | 2505325 | 102396 |
| 14" Slip-on Blade Guard | 6048912 | 97088 |
| 20" Slip-On Blade Guard | 6048904 | 98682 |

See other options for the CC1800XL on page 101




EPA CERTIFIED
to run propane



CC1800XL MEDIUM SAW

Powered By:



CC1823BVXL-S
with Briggs Vanguard



CC1820HXL-S
with Honda®

Blade not included

Blade not included

14"-20" Blade Capacity

Gasoline

Electric

Hydraulic

FEATURES

- Electric start option on Honda and Briggs Vanguard models
- Pull start backup on Briggs Vanguard models
- Push or self propelled models
- Easy access to battery with heavy duty isolator switch to prevent battery drain
- Screw feed raise and lower
- Lifting hook standard on all models
- Self aligning blade shaft bearings

Includes: Electric start (18-23HP), Low Oil Alert,
Tach/hour meter (18-23 HP)

Note: Electric saws do not ship with electric cord or pigtails.
3-Phase powered saws do not include male electric connector for control box

SPECIFICATIONS

| | |
|----------------------------------|---|
| Max. Depth of Cut with 14" Blade | 4-5/8" |
| Max. Depth of Cut with 18" Blade | 6-5/8" |
| Max. Depth of Cut with 20" Blade | 7-5/8" |
| Blade Shaft RPM | 2600 |
| Blade Shaft Diameter | 1-1/4" |
| Arbor Size | 1" with single drive pin |
| Blade Shaft Drive | 3 belts on 11.7HP, 4 belts on other models |
| Blade Mounting | Right or Left |
| Transmission | Eaton Model 7 |
| Drive Speed | 0-80 feet per minute |
| Fuel Capacity (gas models) | 2 gallon |
| Wheel Dimensions | 5" x 1-1/2" x 3/4" (Front) 6" x 1-1/2" x 5/8" (Back) |



CC1800XL MEDIUM WALK BEHIND SAW-PUSH MODELS

| Model # | Engine/Motor Make/Model | Engine/Motor Power | Power Source | Part # with 14" Guard | Cat # with 14" Guard | Part # with 20" Guard | Cat # with 20" Guard | Product Weight (lbs.) |
|--------------|-------------------------|---------------------------------|--------------|-----------------------|----------------------|-----------------------|----------------------|-----------------------|
| CC1875E1XL-P | Baldor® | 7.5 HP, 230V-1PH | Electric | 5800628 | 54480 | 5800629 | 54490 | 395 |
| CC1810E3XL-P | Baldor® | 10 HP, 230V-3PH | Electric | 5800692A | 54485 | 5800693A | 54497 | 420 |
| CC1810E3XL-P | Baldor® | 10 HP, 460V-3PH | Electric | 5800692B | 54565 | 5800693B | 54580 | 425 |
| CC1810E3XL-P | Baldor® | 10 HP, 575V-3PH | Electric | 5800692C | 54568 | 5800693C | 54581 | 430 |
| CC1811HXL-P | Honda® GX390 Gas | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 5800694 | 54486 | 5800695 | 54498 | 310 |
| CC1811HEXL-P | Honda® GX390 Gas ▶ | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 5802258 | 27946 | 5802259 | 17244 | 280 |
| CC1818HYXL-P | Danfoss® | 15 gpm | Hydraulic | 5800698A | 54489 | 5800699A | 54506 | 300 |
| CC1818HYXL-P | Danfoss® | 20 gpm | Hydraulic | 5800698B | 54571 | 5800699B | 54582 | 300 |
| CC1818HYXL-P | Danfoss® | 25 gpm | Hydraulic | 5800698C | 54579 | 5800699C | 54593 | 300 |

CC1800XL MEDIUM WALK BEHIND SAW-SELF-PROPELLED MODELS

| | | | | | | | | |
|--------------|----------------------|---------------------------------|-----------|----------|-------|----------|-------|-----|
| CC1875E1XL-S | Baldor® | 7.5 HP, 230V-1PH | Electric | 5800736 | 54507 | 5800737 | 54539 | 450 |
| CC1810E3XL-S | Baldor® | 10 HP, 230V-3PH | Electric | 5800738A | 54508 | 5800739A | 54540 | 460 |
| CC1810E3XL-S | Baldor® | 10 HP, 460V-3PH | Electric | 5800738B | 54596 | 5800739B | 54600 | 380 |
| CC1810E3XL-S | Baldor® | 10 HP, 575V-3PH | Electric | 5800738C | 54597 | 5800739C | 54601 | 380 |
| CC1811HXL-S | Honda® GX390 Gas | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 5800643 | 54536 | 5800644 | 54541 | 380 |
| CC1811HEXL-S | Honda® GX390 Gas ▶ | 11.7 HP, 19.5 Torque (lbs.-ft.) | Gas | 5802260 | 27947 | 5802261 | 78112 | 395 |
| CC1818HYXL-S | Danfoss® | 15 gpm | Hydraulic | 5800647A | 54538 | 5800648A | 54549 | 350 |
| CC1818HYXL-S | Danfoss® | 20 gpm | Hydraulic | 5800647B | 54598 | 5800648B | 54604 | 350 |
| CC1818HYXL-S | Danfoss® | 25 gpm | Hydraulic | 5800647C | 54599 | 5800648C | 54623 | 350 |
| CC1820HXL-S | Honda® GX630 ▶♦ | 20.8 HP, 35.6 Torque (lbs.-ft.) | Gas | 5800667 | 51234 | 5800668 | 53351 | 470 |
| CC1823BVXL-S | Briggs® Vanguard ▶♦□ | 23 HP | Gas | 5801218 | 22269 | 5801219 | 22271 | 460 |

CC1820HXL-24S - MEDIUM WALK BEHIND SELF-PROPELLED

| Model # | Engine/Motor Make/Model | Engine/Motor Power | Power Source | Part # with 24" Guard | Cat # with 24" Guard | Product Weight (lbs.) |
|---------------|-------------------------|-------------------------------|--------------|-----------------------|----------------------|-----------------------|
| CC1820HXL-24S | Honda® GX630 ▶♦ | 20.8 HP 25.6 Torque (lbs.ft.) | Gas | 5801229 | 68448 | 490 |

▶ Electric start ♦ Includes remote cyclone air cleaner □ Gross horsepower at 3600 RPM per SAEJ1940
Horsepower and Torque as rated by the engine manufacturer.



CC1800XL control panel with screw feed, ignition switch, adjustable handles and hour meter. Handles have two sets of grips that can be positioned outward or inward (as shown).

CC1800XL OPTIONS

| Description | Part # | Cat # |
|---|----------|--------|
| Electric Water Pump (electric start engines only) | 6048970 | 66686 |
| Water Tank Kit* (7.5 gallon)* | 6049020 | 70611 |
| Tach/Hour Meter-Digital (displays engine RPM) ♦ | 2801502 | 36079 |
| Weight Kit (26 lbs) ** | 6048959 | 66687 |
| Parking Brake | 6048873 | 66688 |
| Catalytic Muffler for 11.7HP GX390 Honda® Engines | 2501567 | 78637 |
| Catalytic Muffler for 20.8HP GX630 Honda® Engines | 2703546 | 68832 |
| Extended Blade Shaft Kit for up to 1" spacing | 6048107 | 48388 |
| 14" Slip-on Blade Guard | 6048912 | 97088 |
| 20" Slip-On Blade Guard | 6048904 | 98682 |
| Flange Lock Kit | 6011702A | 102737 |

* For dust suppression when dry cutting only-not available on electric saws.

♦ Standard on all 18HP and 23HP models.

** Standard on all electric saws with 20" blade capacity and saws over 15HP.